left; if not often enough, to the right. Tighten the check nut after changing the adjustment. The shunt magnet is in multiple with the arc and should close the contacts when the arc voltage rises momentarily to 125

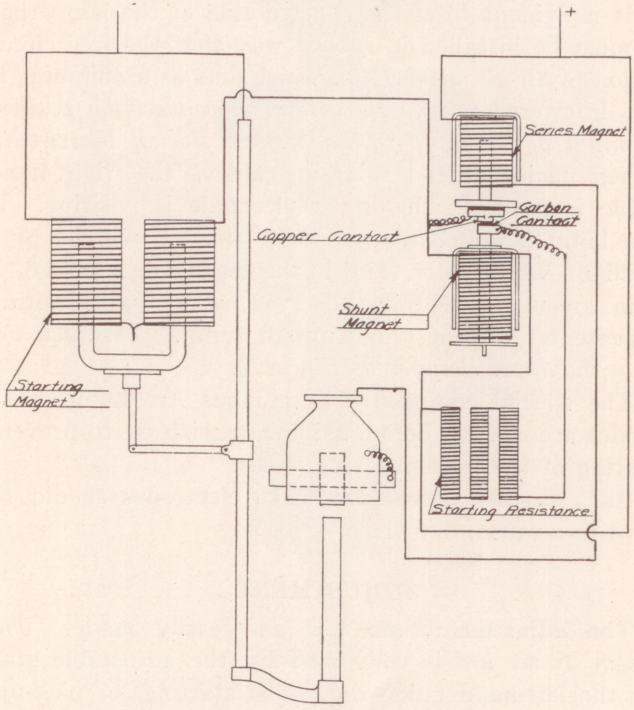

CONNECTIONS OF LUMINOUS ARC LAMP
FORM 3
FOR DIRECT CURRENT SERIES CIRCUITS

volts. This will occur when the average voltage is approximately 80 volts.

The following precautions should be observed: The positive, or upper electrode, should be free and have